




Image Sensor	1280 × 1024 Resolution	240 Hz Native Frame Rate	4.2 ms Latency
Tracking Performance & Range¹	3D Accuracy +/- 0.30 mm	Passive Markers 9 m (30')	Active Markers 15 m (50')
Global Shutter	Default Speed 0.25 ms	Minimum Speed 0.01 ms	Maximum Speed 3.9 ms at 240 fps
Image Processing Types	Object Segment	Raw Greyscale MJPEG Grayscale	
Connections	GigE data port	PoE power	Ethernet camera sync
Lens & Filter	Stock Lens 82° × 70° FOV	Adjustable Focus	Filter Switcher Included
LED Ring	10 LEDs Ultra High Power 850nm Infrared	Strobe Mode Intensity control	

Size & Weight

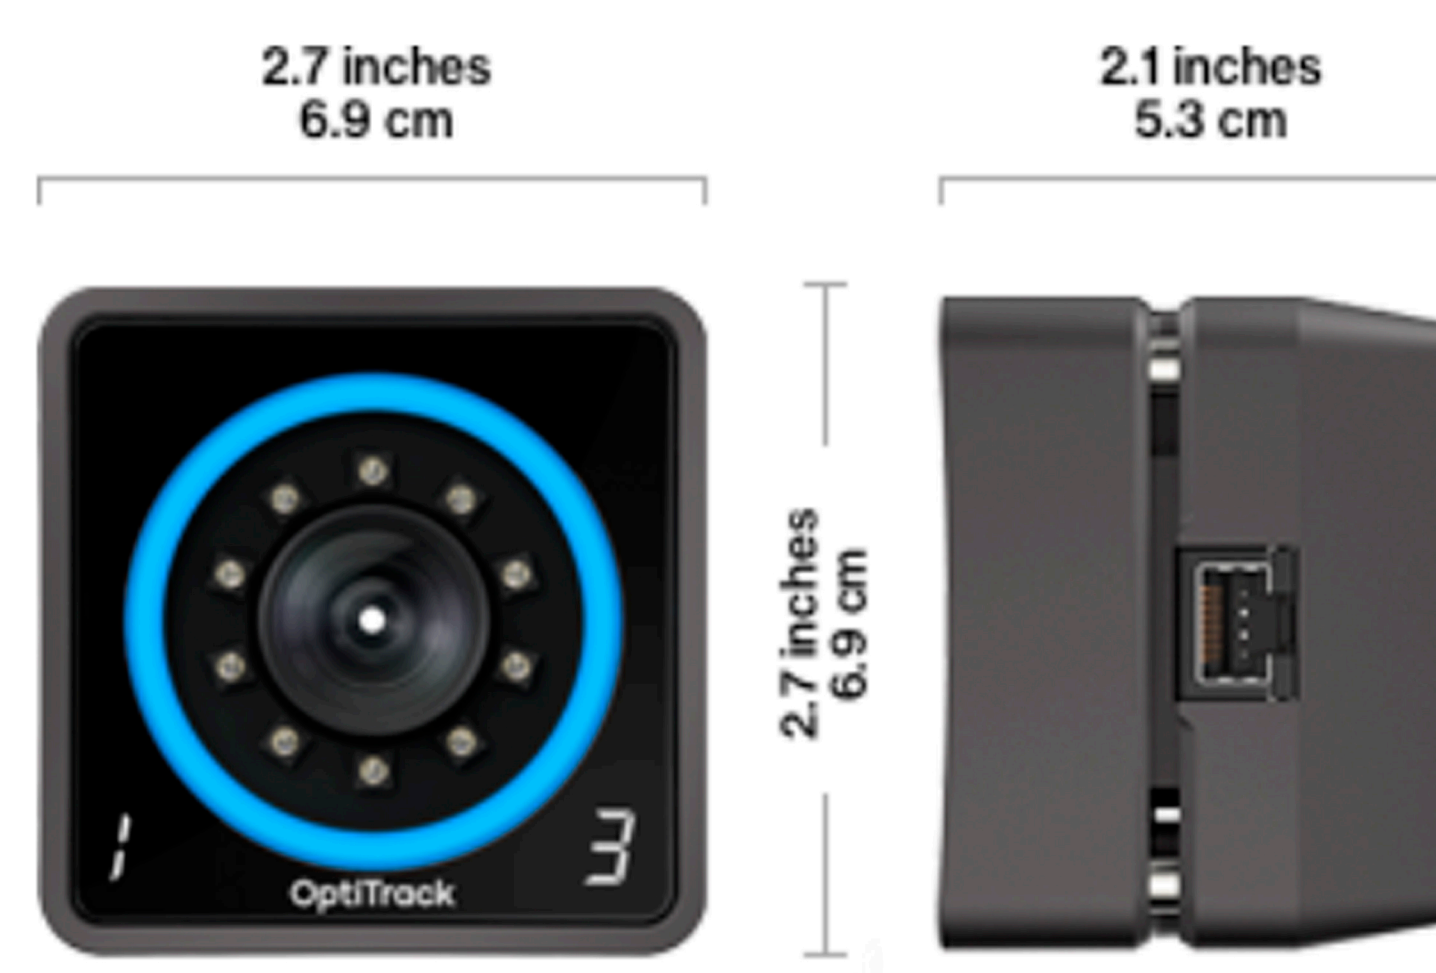

Width

2.7 inches (6.86 cm)

Height

2.7 inches (6.86 cm)

Depth

2.1 inches (5.46 cm)

Weight

0.7 pounds (0.32 kg)

Camera Body

Aluminum &
Polycarbonate

1/4"-20 Standard
Tripod Mount (×2)

2 digit numeric LEDs
status indicators

Full-color LED health
and activity indicator